

HORNET™ G2 QXE 200-21



3000
200 BAR
PSI

21
L/PM

HONDA GX390
PETROL
ENGINE TYPE
POWERED by HONDA

GEARBOX
1450RPM
DRIVE

COLD
WATER
OUTPUT



HERO INNOVATIONS

- PEXO™**
Stainless Steel Exoskeleton
- JWPP™**
Jetwave Italian Premium Pump
- CC™**
Centralised Control
- AVPS™**
Anti Vibration Protection System
- MC™**
Multi Configuration



Registered Design ® 202215870

APPLICATIONS

- Tradesmen
- Commercial & Exterior Cleaning
- Agriculturist
- Construction



STANDOUT FEATURES

- JW® UDOR® Premium** Italian plunger pump running at 1450RPM, delivers more performance and longer life.
- Honda™ QXE GX390** Industrial Series Engine with **electric key start** (back up pull start).
- Jetwave Safety System™ (JSS)** thermal and safety valve to prevent overheating in excessive bypass and over pressurisation.
- Heavy duty JW Premium** brass adjustable unloader valve. With flat spring design for longevity.
- Battery isolator** to prevent battery voltage loss, when not in use.
- Emergency stop** for increased operator safety.

STANDARD EQUIPMENT



Gun: (SKU: J5500K) J5500K LTF Spray Gun

Lance: (SKU: JW-007-JB) JW Single Lance with JetBlade nozzle socket

Nozzle: (SKU: JB-2506) 1 x JetBlade nozzle & JetBlade nozzle holder (SKU: JB-NP)


Hose: (SKU: JWA018-SC-ASSY) 10m DWB 3/8" Hose with m22 couplings

Storage: (SKU: G2WASHCASE) G2 Washcase

WASHCASE VIDEO

JETBLADE VIDEO

DIMENSIONS (MM)

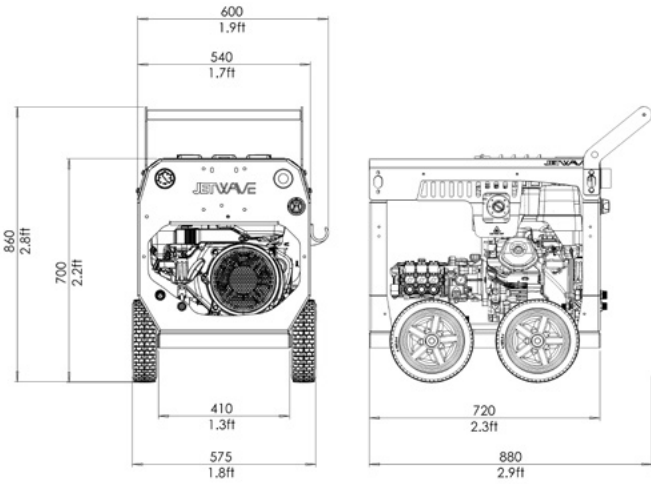

TECHNICAL DATA 0:00

HORNET™

C2

QXE 200-21

Product Code	CW3000-21PEG2
Pressure / Flow Rate	3000 PSI (200 BAR) / 21 L/PM (1260 L/PH) / 5.5 GPM
Max Water Inlet Temp	50°C / 122°F
Class (AS/NZS: 4223)	A (4,200 Bar/Litres)
Usage Frequency	Professional: Daily
Nozzle Size	06
Frame Structure	CNC Modular galvanised sheet steel chassis plus satin powder coat finish and stainless steel cover

MOTOR FEATURES 

Engine / Power	Honda™ GX390 QXE Electric Start (air cooled) 13HP / 390cc
Fuel Type / Capacity / Protection	Unleaded / 6.1L / Low Oil Shutdown

HYDRAULIC FEATURES 

Pump / Head / Pistons	JW® UDOR® Premium Triplex Plunger / Brass (Nickle Plated) / Ceramic
Motor Pump Coupling / Pump RPM	Gearbox Drive / 1450RPM
Unloader Valve	Independent - Adjustable (Panel Mounted)
Safety Valve	Yes

DIMENSIONS & WEIGHT 

Machine Dimensions / Weight	880mm(L) x 575mm(W) x 860mm(H) / 90KG (approx.)
-----------------------------	---

WARRANTY(S) 

Unit / Pump Warranty*	 2 Year(s)
Engine Warranty*	 3 Year(s)

OPTIONAL UPGRADES	SKU	OPTIONAL ACCESSORIES	SKU
JW® PRO RAPID 30M HOSE REEL FITTED WITH 30M HOSE	1060CMPL-HOR30M	JW® PRO TURBO HEAD	JWA303-06
JW® PRO RAPID 60M HOSE REEL FITTED WITH 60M HOSE	1067CMPL-HOR60M	JW® SINGLE BYPASS PRO FOAM COMPLETE KIT	PROFOAM
JW® CONCRETER PACK UPGRADE	PACK-CON	JW® 21" FLAT SURFACE CLEANER - STAINLESS STEEL	JWA-FSC22-5
JW® AGRICULTURE PACK UPGRADE	PACK-AG	JW® TWIN LANCE (WITH PRESSURE CONTROL)	JW54.2