

HORNET™ G2 QXE 280-15



4060
280 BAR
PSI

15
L/PM

HONDA GX390
PETROL
ENGINE TYPE
POWERED by HONDA

GEARBOX
1450RPM
DRIVE

COLD
WATER
OUTPUT



HERO INNOVATIONS

- PEXO™**
Stainless Steel Exoskeleton
- JWPP™**
Jetwave Italian Premium Pump
- CC™**
Centralised Control
- AVPS™**
Anti Vibration Protection System
- MC™**
Multi Configuration



Registered Design ® 202215870

APPLICATIONS

- Tradesmen
- Commercial & Exterior Cleaning
- Agriculturist
- Construction



STANDOUT FEATURES

- JW® UDOR® Premium** Italian plunger pump running at 1450RPM, delivers more performance and longer life.
- Honda™ QXE GX390** Industrial Series Engine with **electric key start** (back up pull start).
- Jetwave Safety System™ (JSS)** thermal and safety valve to prevent overheating in excessive bypass and over pressurisation.
- Heavy duty JW Premium** brass adjustable unloader valve. With flat spring design for longevity.
- Battery isolator** to prevent battery voltage loss, when not in use.
- Emergency stop** for increased operator safety.

G2 MORE FEATURES.
MORE INNOVATION.
MORE TECHNOLOGY.

JETWAVEGROUP.COM



STANDARD EQUIPMENT



Gun: (SKU: J5500K) J5500K LTF Spray Gun


Lance: (SKU: JW-007-JB) JW Single Lance with JetBlade nozzle socket

Nozzle: (SKU: JB-2504) 1 x JetBlade nozzle & JetBlade nozzle holder (SKU: JB-NP)

Hose: (SKU: JWA018-SC-ASSY) 10m DWB 3/8" Hose with m22 couplings

Storage: (SKU: G2WASHCASE) G2 Washcase

DIMENSIONS (MM)

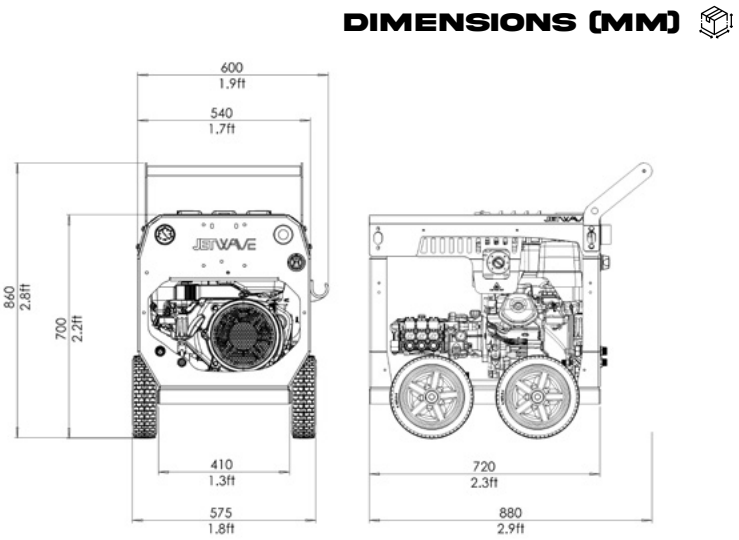

View	Dimension	Value (mm)	Value (ft)
Front View	Overall Width	600	1.9
	Upper Body Width	540	1.7
	Lower Body Width	410	1.3
	Wheelbase	700	2.2
	Overall Height	860	2.8
Side View	Overall Width	720	2.3
	Wheelbase	880	2.9
	Overall Height	575	1.8

TECHNICAL DATA 0:00		HORNET™ G2 QXE 280-15			
Product Code	CW4000-15PEG2				
Pressure / Flow Rate	4060PSI (280 BAR) / 15 L/PM (900 L/PH) / 4 GPM				
Max Water Inlet Temp	50°C/ 122°F				
Class (AS/NZS: 4223)	A (4,200 Bar/Litres)				
Usage Frequency	Professional: Daily				
Nozzle Size	04				
Frame Structure	CNC Modular galvanised sheet steel chassis plus satin powder coat finish and stainless steel cover				
MOTOR FEATURES					
Engine / Power	Honda™ GX390 QXE Electric Start (air cooled) 13HP / 390cc				
Fuel Type / Capacity / Protection	Unleaded / 6.1L / Low Oil Shutdown				
HYDRAULIC FEATURES					
Pump / Head / Pistons	JW® UDOR® Premium Triplex Plunger / Brass (Nickle Plated) / Ceramic				
Motor Pump Coupling / Pump RPM	Gearbox Drive / 1450RPM				
Unloader Valve	Independent - Adjustable (Panel Mounted)				
Safety Valve	Yes				
DIMENSIONS & WEIGHT					
Machine Dimensions / Weight	880mm(L) x 575mm(W) x 860mm(H) / 90KG (approx.)				
WARRANTY(S)					
Unit / Pump Warranty*	2 Year(s)				
Engine Warranty*	3 Year(s)				
OPTIONAL UPGRADES	SKU	OPTIONAL ACCESSORIES	SKU		
JW® PRO RAPID 30M HOSE REEL FITTED WITH 30M HOSE	1060CMPL-HOR30M	JW® PRO TURBO HEAD	JWA303-04		
JW® PRO RAPID 60M HOSE REEL FITTED WITH 60M HOSE	1067CMPL-HOR60M	JW® SINGLE BYPASS PRO FOAM COMPLETE KIT	PROFOAM		
JW® CONCRETER PACK UPGRADE	PACK-CON	JW® 21" FLAT SURFACE CLEANER - STAINLESS STEEL	JWA-FSC22-5		
JW® AGRICULTURE PACK UPGRADE	PACK-AG	JW® TWIN LANCE (WITH PRESSURE CONTROL)	JW54.2		

Copyright © 2026 Jetwave® Group Pty Ltd. All Rights Reserved.

The manufacturer reserves the right to modify design features and technical facts without notice; due to our principals of continuous improvement.

*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).

V5.0 01/26

JETWAVE

1800 029 300

sales@jetwave.com.au

jetwavegroup.com